




FUTURELINE

ADSS-MT-DS

ADSS MULTITUBE DOUBLE SHEATH

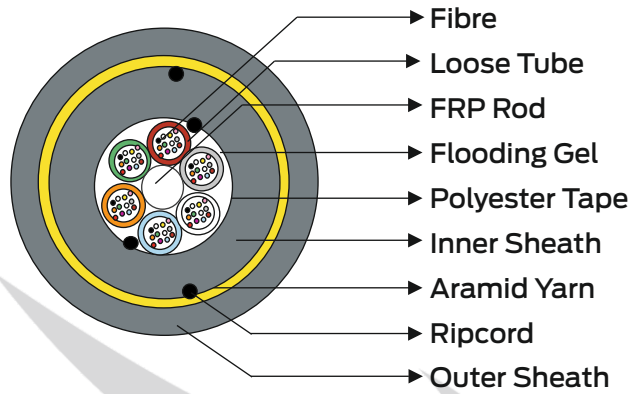


MULTITUBE DOUBLE SHEATH ADSS (WET CORE)

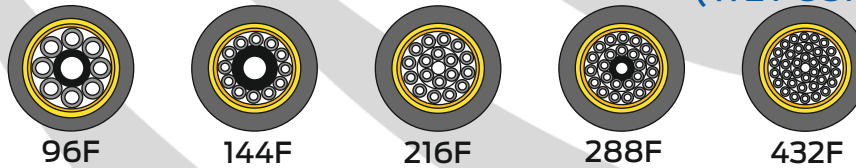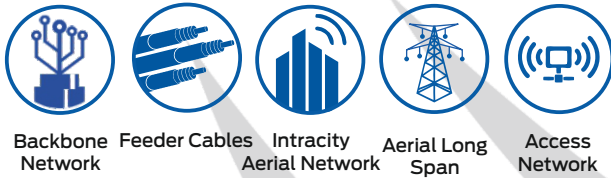

RATING

KEY FEATURE V.LOW LOW MED HIGH V.HIGH

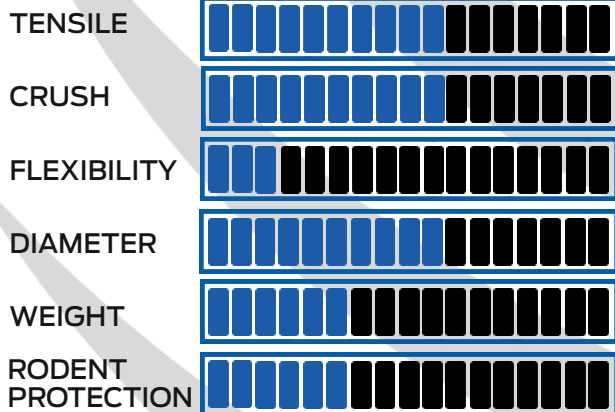


CUSTOMIZED OPTIONS

- Different Fibre Counts
- Single mode and Multimode Fibres
- Sheath in LDPE/MDPE/LSZH/HDPE/LLDPE
- Desired Sheath Colour
- Dry Core
- Track Resistant Sheath
- Enhanced Mechanical Characteristics
- Stripe Outer Sheath

MULTITUBE DOUBLE SHEATH ADSS CABLES

TYPE	FIBRE COUNT	FIBRE/TUBE	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)		CRUSH	BENDING RADIUS	
					I	O		I	O
	4-24	4	12.5 ± 0.5	120 ± 10	4500	4000	3000 N/10 CM	15 X D	20 X D
	6-36	6	12.5 ± 0.5	125 ± 10	4500	4000			
	8-48	8	13.5 ± 0.5	135 ± 15	4500	4000			
	12-72	12	13.5 ± 0.5	140 ± 15	4500	4000			
	96	12	14.5 ± 0.5	165 ± 15	5000	4500			
	144	12	17.5 ± 1.0	240 ± 25	6000	5500			
	192	12	18.0 ± 1.0	250 ± 25	6000	5500			
	216	12	18.0 ± 1.0	255 ± 25	6000	5500			
	288	12	20.5 ± 2.0	320 ± 30	6000	5500			
	432	12	22.5 ± 2.0	440 ± 40	7500	6500			
	144	24	15.0 ± 1.0	185 ± 20	7500	6500			
	192	24	17.0 ± 1.0	235 ± 25	7500	6500			
	216	24	18.0 ± 1.0	260 ± 25	7500	6500			
	288	24	21.0 ± 2.0	345 ± 35	7500	6500			
	432	24	21.5 ± 2.0	355 ± 35	7500	6500			

TEMPERATURE PERFORMANCE (°C)

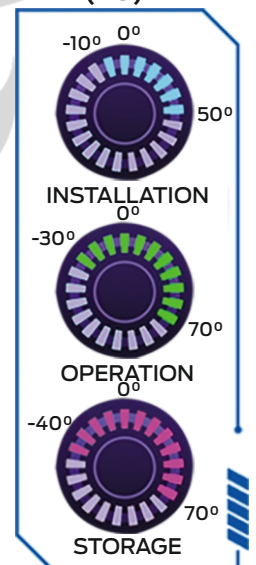

I - INSTALLATION O - OPERATIONAL D - CABLE DIAMETER

STANDARD COMPLIANCE

TELECORDIA GR-20 IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS