


- ### CUSTOMIZED OPTIONS
- Different Fibre Counts
 - Single mode and Multimode Fibres
 - Sheath in LDPE/MDPE/LSZH/LLDPE/HDPE
 - Desired Sheath Colour
 - Wet Core
 - Track Resistant Sheath
 - Enhanced Mechanical Characteristics
 - Stripe Outer Sheath

MULTITUBE SINGLE SHEATH ADSS CABLES

TYPE	FIBRE COUNT	FIBRE/TUBE	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)		CRUSH	BENDING RADIUS	
					I	O		I	O
1-6T x 4F	4-24	4	10 ± 0.5	70 ± 10	2500	2000	2000 N/10 CM	15 X D	20 X D
1-6T x 6F	6-36	6	10.5 ± 0.5	75 ± 10	2500	2000			
1-6T x 8F	8-48	8	11 ± 0.5	85 ± 10	3000	2500			
1-6T x 12F	12-72	12	11 ± 0.5	85 ± 10	3000	2500			
8T x 12F	96	12	12 ± 0.5	110 ± 15	4000	3500			
12T x 12F	144	12	15 ± 1.0	165 ± 15	6000	5500			
16T x 12F	192	12	16 ± 1.0	160 ± 15	6000	5500			
18T x 12F	216	12	16 ± 1.0	165 ± 15	6000	5500			
24F x 12F	288	12	18 ± 1.0	230 ± 25	6000	5500			
36T x 12F	432	12	21.0 ± 2.0	300 ± 30	6000	5500			
6T x 24F	144	24	13 ± 0.5	120 ± 10	4500	4000			
8T x 24F	192	24	14.5 ± 0.5	160 ± 15	6000	5500			
9T x 24F	216	24	15.5 ± 1.0	180 ± 20	6500	6000			
12T x 24F	288	24	18.5 ± 1.0	255 ± 25	6500	6000			
18T x 24F	432	24	19.5 ± 1.0	255 ± 25	6500	6000			

TEMPERATURE PERFORMANCE (°C)

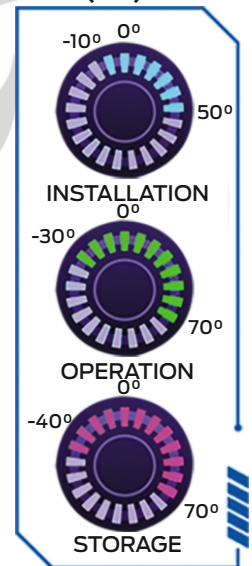

I - INSTALLATION O - OPERATIONAL D - CABLE DIAMETER

STANDARD COMPLIANCE

TELECORDIA GR-20 IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS