



UNITUBE SINGLE SHEATH ADSS

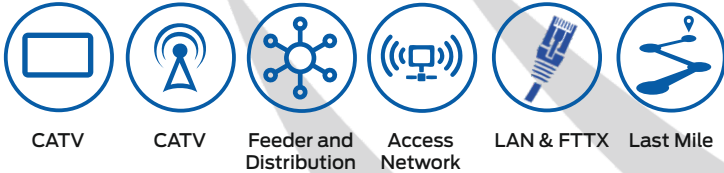


RATING

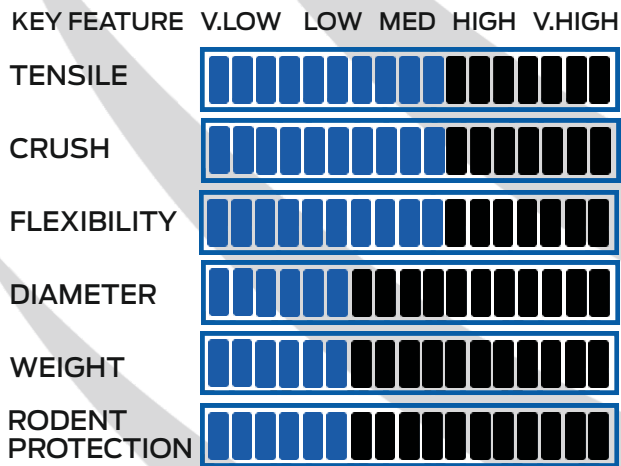

CUSTOMIZED OPTIONS

- Single mode and Multimode Fibres
- Single or Bunch wire
- Outer Sheath in LDPE/MDPE/LSZH/HDPE /LLDPE
- Desired Sheath Colour
- Enhanced Tensile performance

TEMPERATURE PERFORMANCE (°C)

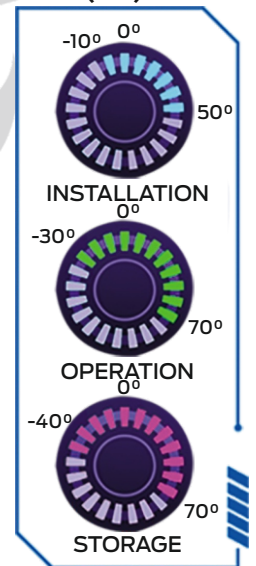

UNITUBE ADSS WITH ARAMID AND 2 FRP

TYPE	FIBRE COUNT	FIBRE/TUBE	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)		CRUSH	BENDING RADIUS	
					I	O		I	O
1T X 2F	2	2	5.3 ± 0.3	22 ± 5	1800	1200	1000 N/10 CM	10 X D	20 X D
1T X 4F	4	4	5.3 ± 0.3	22 ± 5					
1T X 6F	6	6	5.3 ± 0.3	22 ± 5					
1T X 8F	8	8	5.3 ± 0.3	22 ± 5					
1T X 12F	12	12	5.3 ± 0.3	22 ± 5					
1T X 16F	16	16	6.0 ± 0.3	28 ± 5					
1T X 24F	24	24	6.0 ± 0.3	28 ± 5					

I - INSTALLATION O - OPERATIONAL D - CABLE DIAMETER

STANDARD COMPLIANCE

TELECORDIA GR-20 IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS