


Indoor Distribution    Branching in High Rises    Pig Tails    Patch Cords    LAN & FTTX

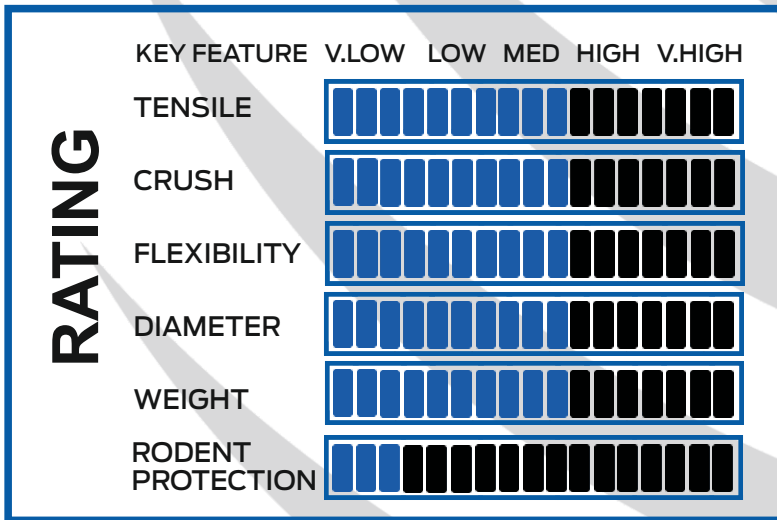


### CUSTOMIZED OPTIONS

- Single mode and Multimode Fibres
- Desired Sheath Colour

### INDOOR DROP CABLE

TYPE	FIBRE COUNT	FIBRE/TUBE	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)		CRUSH	BENDING RADIUS	
					I	O		I	O
1T x 2F	2	2	(3.5 x 6.5) ± 0.3	25 ± 5	1200	800	1000 N	20MM	32MM
1T x 4F	4	4	(3.5 x 6.5) ± 0.3	25 ± 5					
1T x 6F	6	6	(3.5 x 6.5) ± 0.3	25 ± 5					
1T x 8F	8	8	(3.5 x 6.5) ± 0.3	25 ± 5					
1T x 12F	12	12	(3.5 x 6.5) ± 0.3	25 ± 5					
2T x 8F	16	8	(3.8 x 8.8) ± 0.3	35 ± 5					
2T x 12F	24	12	(3.8 x 8.8) ± 0.3	35 ± 5					

TEMPERATURE PERFORMANCE (°C)

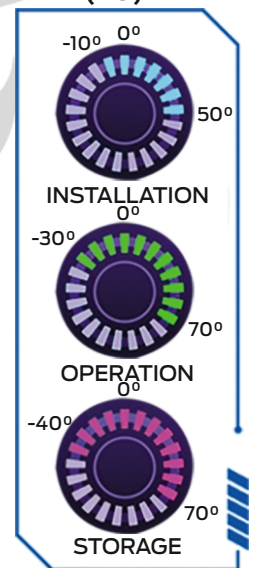

I - INSTALLATION    O - OPERATIONAL    D - CABLE DIAMETER

## STANDARD COMPLIANCE

TELECORDIA GR-20 IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS