


ARMOURED UNITUBE FIG 8



CATV Feeder and Distribution Access Network LAN & FTTX Last Mile

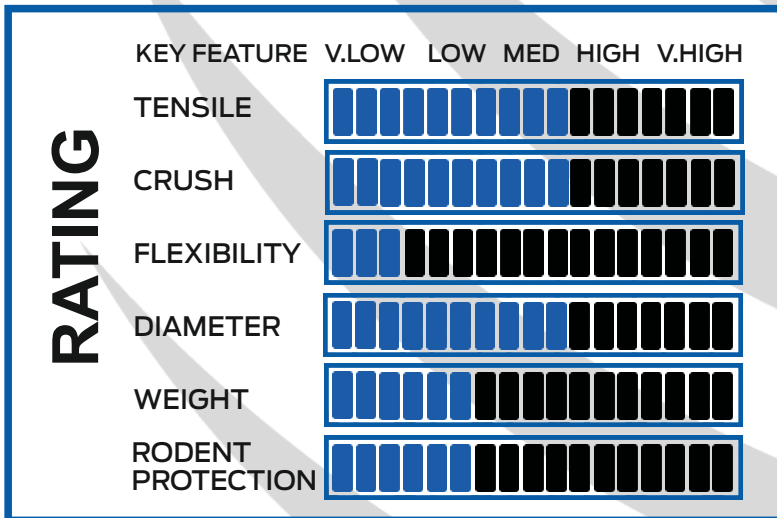


- CUSTOMIZED OPTIONS**
- Single Mode and Multimode Fibres
 - Messenger FRP or Bunch wire or Messenger steel wire
 - Outer Sheath in LDPE/MDPE/LSZH/HDPE /LLDPE
 - Desired Sheath Colour
 - Enhanced Tensile performance

UNITUBE ARMOURED FIG 8

TYPE	FIBRE COUNT	FIBRE/TUBE	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)		CRUSH	BENDING RADIUS	
					I	O		I	O
1T x 2F	2	2	(7.5 x 15.0) ± 1.0	125.0 ± 15	2500	2000	2000 N/10 CM	15 X D	20 X D
1T x 4F	4	4	(7.5 x 15.0) ± 1.0	125.0 ± 15					
1T x 6F	6	6	(7.5 x 15.0) ± 1.0	125.0 ± 15					
1T x 8F	8	8	(7.5 x 15.0) ± 1.0	125.0 ± 15					
1T x 12F	12	12	(7.5 x 15.0) ± 1.0	125.0 ± 15					
1T x 16F	16	16	(7.5 x 15.0) ± 1.0	125.0 ± 15					
1T x 24F	24	24	(8.0 x 15.5) ± 1.0	130.0 ± 15					

I - INSTALLATION O - OPERATIONAL D - CABLE DIAMETER

TEMPERATURE PERFORMANCE (°C)

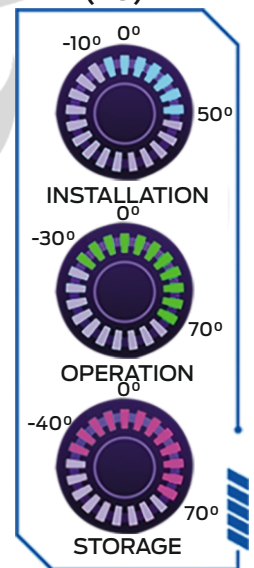

STANDARD COMPLIANCE

TELECORDIA GR-20 IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS