


### MULTITUBE ARMoured (DRY CORE) SINGLE SHEATH




Backbone Network    Feeder and Distribution    Access Network    Duct Manual Pulling    Outdoor Direct Burial

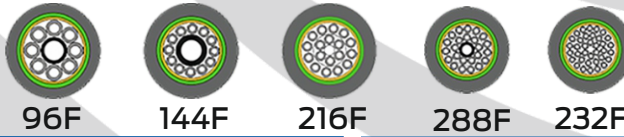

## RATING


KEY FEATURE    V.LOW    LOW    MED    HIGH    V.HIGH

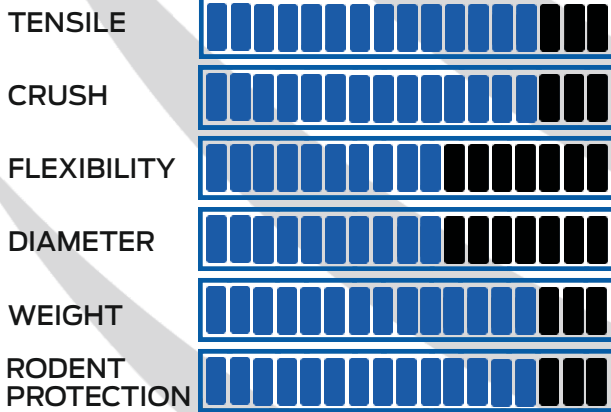

### CUSTOMIZED OPTIONS

- Different Fibre Counts
- Single mode and Multimode
- Outer Sheath in LDPE/MDPE/LSZH/HDPE/LLDPE
- Desired Sheath Colour
- Wet Core / Dry Tube Construction
- Sacrificial Nylon Sheathing
- Polyal Moisture Barrier Tape
- Steel wire as central strength member
- Enhanced Mechanical Characteristics

### TEMPERATURE PERFORMANCE (°C)

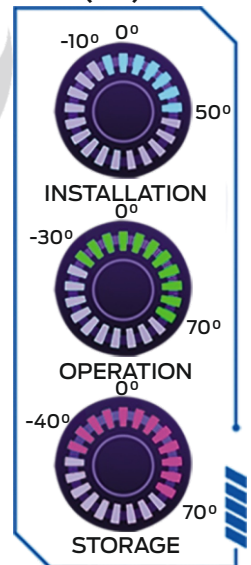

### MULTITUBE ARMoured SINGLE SHEATH CABLE

TYPE	FIBRE COUNT	FIBRE/TUBE	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)		CRUSH	BENDING RADIUS	
					I	O		I	O
1-6T x 4F	4-24	4	11.0 ± 0.5	110 ± 10	2000	1500	2000 N/10 CM	15 X D	20 X D
1-6T x 6F	6-36	6	11.0 ± 0.5	115 ± 10	2000	1500			
1-6T x 8F	8-48	8	11.5 ± 0.5	125 ± 10	2500	1500			
1-6T x 12F	12-72	12	11.5 ± 0.5	125 ± 10	2500	1500			
8T x 12F	96	12	12.0 ± 0.5	150 ± 15	3000	2000			
12T x 12F	144	12	15.5 ± 1	225 ± 20	3500	3000	2000 N/10 CM	15 X D	20 X D
16T x 12F	192	12	17.0 ± 1	225 ± 20	5000	4000			
18T x 12F	216	12	17.0 ± 1	225 ± 20	5000	4000			
24T x 12F	288	12	18.5 ± 1	295 ± 30	5000	4500			
36T x 12F	432	12	21.5 ± 2	385 ± 35	4500	4000			

I - INSTALLATION    O - OPERATIONAL    D - CABLE DIAMETER

### STANDARD COMPLIANCE

TELECORDIA GR-20 IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS