

Premises Distribution    Feeder and Distribution    Ducts and Trays    Last Mile    LAN & FTTX

### SPIRAL ARMoured CABLE

RATING	KEY FEATURE	V.LOW	LOW	MED	HIGH	V.HIGH	
	TENSILE	█	█	█	█	█	█
	CRUSH	█	█	█	█	█	█
	FLEXIBILITY	█	█	█	█	█	█
	DIAMETER	█	█	█	█	█	█
	WEIGHT	█	█	█	█	█	█
	RODENT PROTECTION	█	█	█	█	█	█


### CUSTOMIZED OPTIONS

- Different Fibre Count
- Single mode and Multimode fibres

TIGHT BUFFER SPIRAL ARMoured CABLE									
TYPE	FIBRE COUNT	FIBRE/TUBE	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)		CRUSH	BENDING RADIUS	
					I	O		I	O
2F	2	2	4.8 ± 0.2	35 ± 5	450	300	2000 N/10 CM	10 X D	20 X D

I - INSTALLATION    O - OPERATIONAL    D - CABLE DIAMETER

### TEMPERATURE PERFORMANCE (°C)

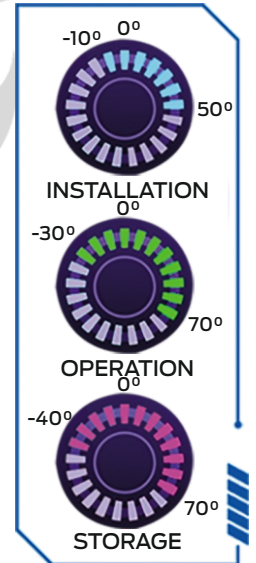

### STANDARD COMPLIANCE

TELECORDIA GR-20 IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS