
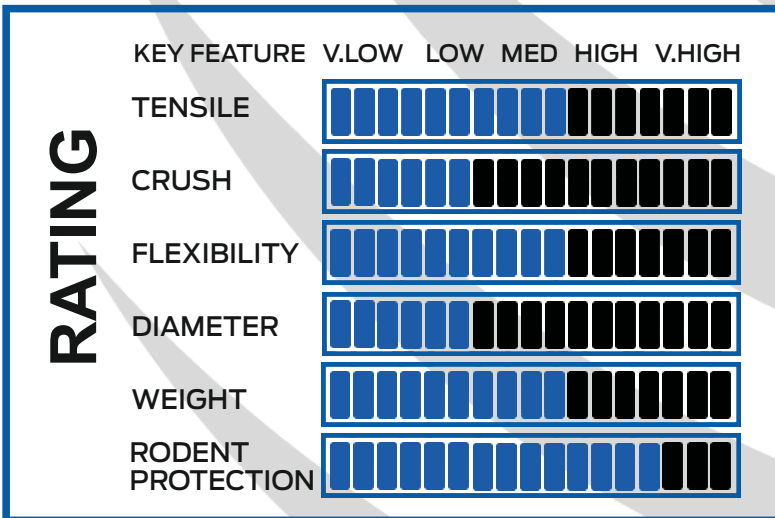


UNITUBE ARMoured WITH GLASS YARNS

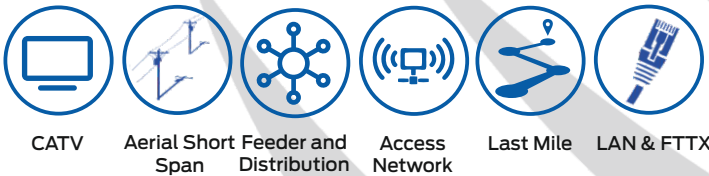


- CUSTOMIZED OPTIONS**
- Single Mode and Multimode Fibres
  - Outer Sheath in LDPE/MDPE/LSZH
  - Desired Sheath Colour
  - Embedded with FRP Rod
  - Enhanced Tensile performance

**UNITUBE ARMoured WITH GLASS YARNS**

TYPE	FIBRE COUNT	FIBRE/TUBE	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)		CRUSH	BENDING RADIUS	
					I	O		I	O
1Tx2F	2	2	8.2 ± 0.5	65.0 ± 5	1000	750	2000 N/10 CM	10 X D	20 X D
1T X 4F	4	4	8.2 ± 0.5	65.0 ± 5	1000	750			
1T X 6F	6	6	8.2 ± 0.5	65.0 ± 5	1000	750			
1T X 8F	8	8	8.2 ± 0.5	65.0 ± 5	1000	750			
1T X 12F	12	12	8.2 ± 0.5	65.0 ± 5	1000	750			
1T X 16F	16	16	8.5 ± 0.5	75.0 ± 10	1000	750			
1T X 24F	24	24	9.2 ± 0.5	90.0 ± 10	1200	1000			
1T X 48F	48	48	10.0 ± 0.5	95.0 ± 10	1200	1000			

TEMPERATURE PERFORMANCE (°C)

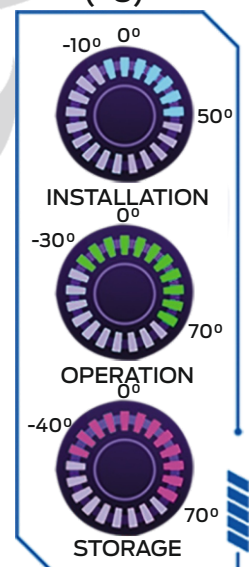

I - INSTALLATION    O - OPERATIONAL    D - CABLE DIAMETER

### STANDARD COMPLIANCE

TELECORDIA GR-20 IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS