


UNITUBE STEEL WIRE ARMoured



Backbone Network    Feeder and Distribution    Access Network    Duct Machine Pulling    Outdoor Direct Burial

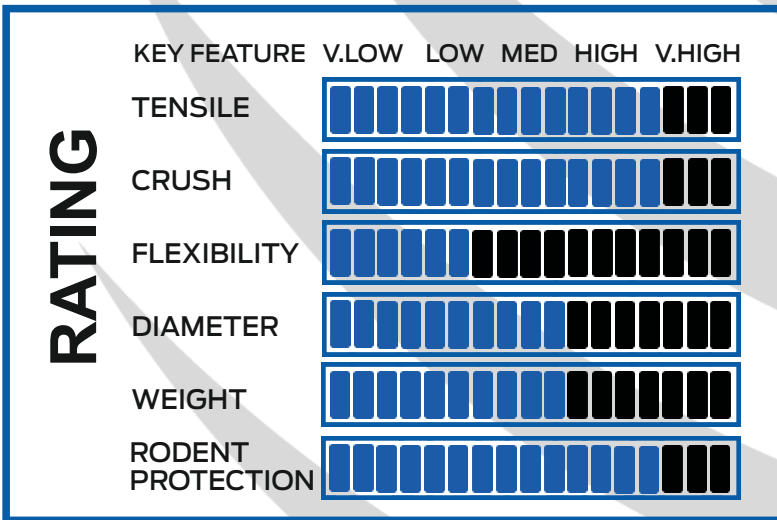


### CUSTOMIZED OPTIONS

- Different Fibre Count
- Single mode and Multimode Fibre
- Outer Sheath in LDPE/MDPE/LSZH/HDPE/LLDPE
- Desired Sheath Colour
- Dielectric with FRP armoring

UNITUBE DOUBLE SHEATH WIRE ARM CABLE									
TYPE	FIBRE COUNT	FIBRE/TUBE	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)		CRUSH	BENDING RADIUS	
					I	O		I	O
4F	4	4	10.0 ± 0.5	165 ± 15	3000	2000	1500 N/10 CM	10 X D	20 X D
6F	6	6	10.0 ± 0.5	165 ± 15					
8	8	8	10.0 ± 0.5	165 ± 15					
12	12	12	10.0 ± 0.5	165 ± 15					
16	16	16	10.0 ± 0.5	165 ± 15					
24	24	24	10.5 ± 0.5	180 ± 20					

I - INSTALLATION    O - OPERATIONAL    D - CABLE DIAMETER

TEMPERATURE PERFORMANCE (°C)

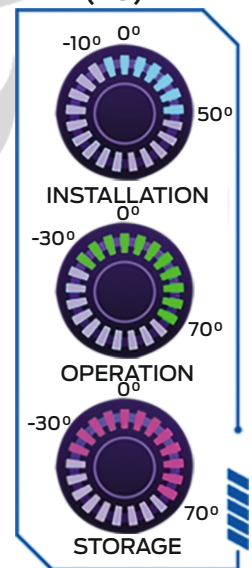

### STANDARD COMPLIANCE

TELECORDIA GR-20 IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS