



**UNARMoured WITH 2FRP + GLASS YARN**

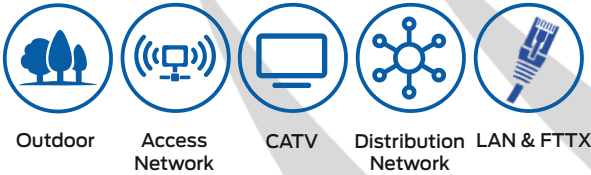

### RATING

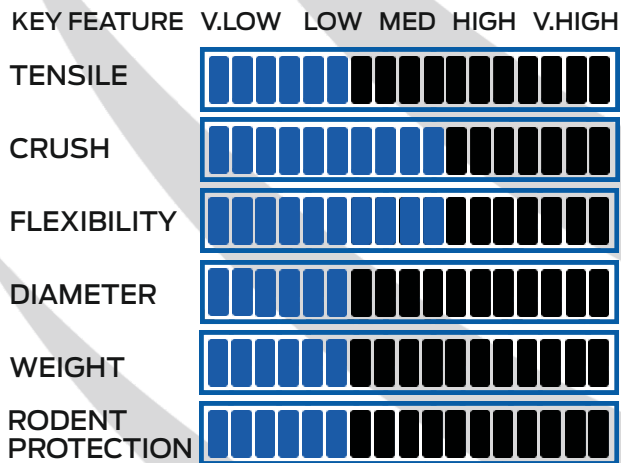

### CUSTOMIZED OPTIONS


- Single Mode and Multimode Fibres
- Outer sheath in HDPE/LDPE/MDPE/LLDPE/LSZH/FR-PE
- Desired Sheath Colour
- Enhanced Tensile Performance
- Dry Tube Construction

### UNITUBE UNARM WITH GLASS YARNS + 2FRP

TYPE	FIBRE COUNT	FIBRE/TUBE	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)		CRUSH	BENDING RADIUS	
					I	O		I	O
1T x 2F	2	2	7.5 ± 0.5	50 ± 5	1500	1000	1000 N/10 CM	10 X D	20 X D
1T x 4F	4	4	7.5 ± 0.5	50 ± 5					
1T x 6F	6	6	7.5 ± 0.5	50 ± 5					
1T x 8F	8	8	7.5 ± 0.5	50 ± 5					
1T x 12F	12	12	7.5 ± 0.5	50 ± 5					
1T x 16F	16	16	8.5 ± 0.5	65 ± 5					
1T x 24F	24	24	8.5 ± 0.5	65 ± 5					

I - INSTALLATION      O - OPERATIONAL      D - CABLE DIAMETER

### TEMPERATURE PERFORMANCE (°C)

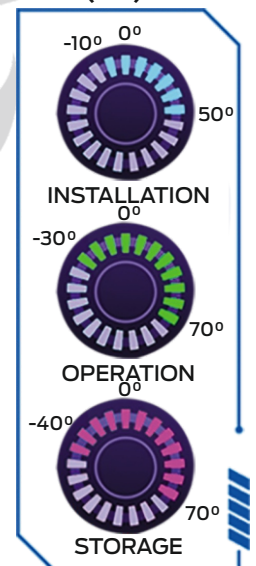

### STANDARD COMPLIANCE

TELECORDIA GR-20 IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS