
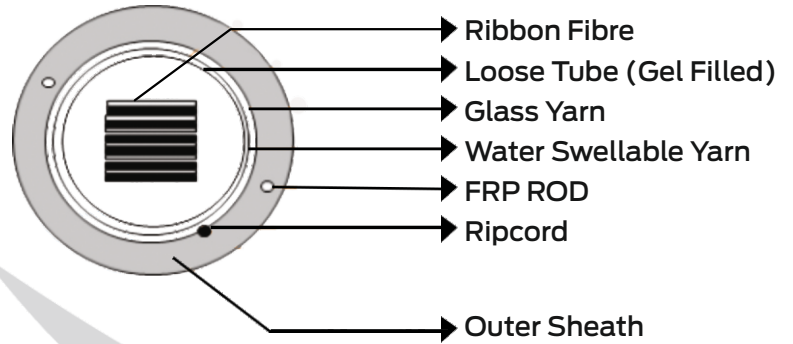



FUTURELINE

D-UT-RF DUCT UNITUBE WITH RIBBON FIBER

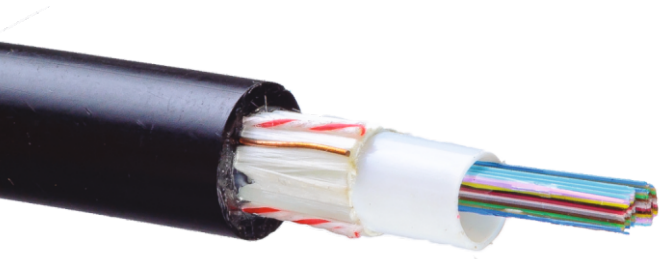

- Duct Blowing
- Compact Design
- Indoor & Outdoor
- Access Network
- CATV
- Distribution Network
- LAN & FTTX

UNARMoured UNITUBE WITH RIBBON FIBRE

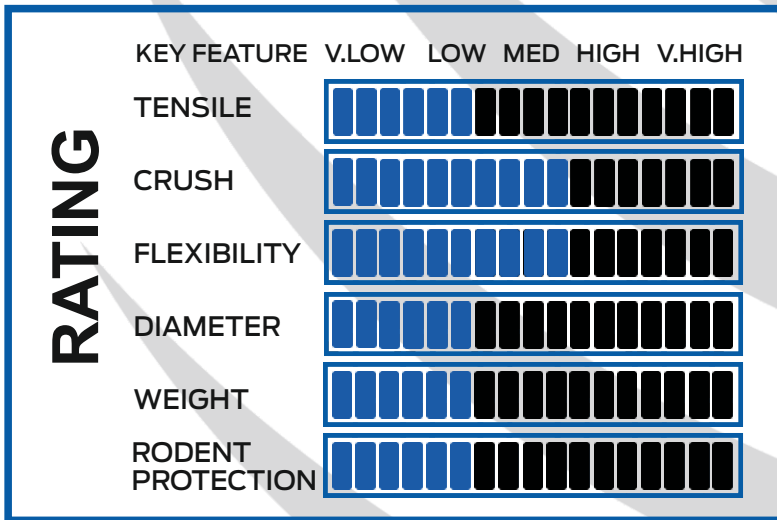


- ### CUSTOMIZED OPTIONS
- Single Mode and Multimode Fibres
 - Outer sheath in HDPE/LDPE/MDPE/LLDPE/LSZH/FR-PE
 - Desired Sheath Colour
 - Enhanced Tensile Performance

UNITUBE UNARM WITH GLASS YARNS

TYPE	FIBRE COUNT	FIBRE/RIBBON	RIBBON/TUBE	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)		CRUSH	BENDING RADIUS	
						I	O		I	O
1t x 4F	48	12	4	11.0 ± 0.5	105 ± 10	1000	500	1000 N/10 CM	10 X D	20 X D
1t x 6F	72	12	6	11.5 ± 0.5	110 ± 10	1000	500			
1t x 8F	96	12	8	12.0 ± 0.5	115 ± 10	1000	500			
1t x 12F	144	12	12	12.5 ± 0.5	125 ± 15	1000	500			

I - INSTALLATION O - OPERATIONAL D - CABLE DIAMETER

TEMPERATURE PERFORMANCE (°C)

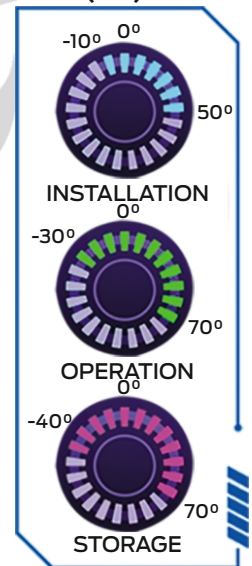

STANDARD COMPLIANCE

TELECORDIA GR-20 IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS