


UNARMoured WITH GLASS YARN

- Duct Blowing
- Compact Design
- Indoor & Outdoor
- Access Network
- CATV
- Distribution Network
- LAN & FTTX

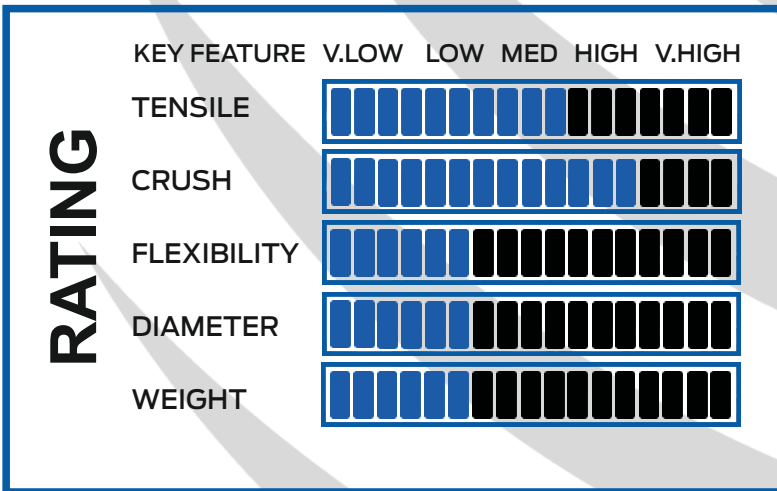


- ### CUSTOMIZED OPTIONS
- Single Mode and Multimode Fibres
 - Outer Sheath in HDPE/LDPE/MDPE/LLDPE/LSZH/FR-PE
 - Desired Sheath Colour
 - Desired Sheath Thickness
 - Enhanced Tensile Performance
 - Dry Tube Construction

UNITUBE UNARM WITH GLASS YARNS									
TYPE	FIBRE COUNT	FIBRE/TUBE	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)		CRUSH	BENDING RADIUS	
					I	O		I	O
1T x 2F	2	2	6.0 ± 0.5	30 ± 5	800	500	1000 N/10 CM	10 X D	20 X D
1T x 4F	4	4	6.0 ± 0.5	30 ± 5					
1T x 6F	6	6	6.0 ± 0.5	30 ± 5					
1T x 8F	8	8	6.0 ± 0.5	30 ± 5					
1T x 12F	12	12	6.0 ± 0.5	30 ± 5					
1T x 16F	16	16	6.5 ± 0.5	45 ± 5					
1T x 24F	24	24	6.5 ± 0.5	45 ± 5					

I - INSTALLATION O - OPERATIONAL D - CABLE DIAMETER

TEMPERATURE PERFORMANCE (°C)

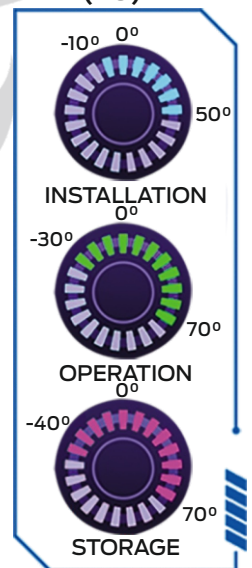

STANDARD COMPLIANCE

TELECORDIA GR-20 IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS