


UNARMoured MICRO MODULE SINGLE SHEATH

RATING	KEY FEATURE	V.LOW	LOW	MED	HIGH	V.HIGH	
	TENSILE	█	█	█	█	█	█
	CRUSH	█	█	█	█	█	█
	FLEXIBILITY	█	█	█	█	█	█
	DIAMETER	█	█	█	█	█	█
	WEIGHT	█	█	█	█	█	█
	RODENT PROTECTION	█	█	█	█	█	█

- ### CUSTOMIZED OPTIONS
- Different Fibres Count
 - Single mode and Multimode Fibres
 - Outer Sheath in LDPE/MDPE/LSZH/HDPE
 - Desired Sheath Colour
 - Dry Core/ Dry Tube Construction
 - Sacrificial Nylon Sheathing
 - Enhanced Mechanical Characteristics

MICRO MODULE CABLE								
TYPE	FIBRE COUNT	FIBRE/MODULE	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)	CRUSH	BENDING RADIUS	
							I	O
1 X 12F	12	12	5.9 ± 0.3	28 ± 5	800	2500 N/10 CM	10 X D	20 X D
2 X 12F	24	12	7.5 ± 0.5	46 ± 5	1000			
3 X 12F	36	12	7.5 ± 0.5	50 ± 5	1000			
4 X 12F	48	12	8.0 ± 0.5	52 ± 5	1000			
6 X 12F	72	12	9.5 ± 0.5	68 ± 5	1600			
8 X 12F	96	12	10.5 ± 0.5	76 ± 5	2200			
12 X 12F	144	12	11.5 ± 0.5	96 ± 5	2200			
24 X 12F	288	12	13.5 ± 0.5	135 ± 10	2700			
36 X 12F	432	12	16.0 ± 0.5	170 ± 15	2800			
48 X 12F	576	12	18.0 ± 0.5	230 ± 15	3000			
60 X 12F	720	12	19.5 ± 0.5	252 ± 15	3500			
72 X 12F	864	12	21.0 ± 0.5	315 ± 15	4000			
1 X 6F	6	6	5.9 ± 0.3	30 ± 5	800			
2 X 6F	12	6	7.5 ± 0.5	40 ± 5	1000			
4 X 6F	24	6	8.0 ± 0.5	48 ± 5	1200			
6 X 6F	36	6	8.0 ± 0.5	58 ± 5	1200			
8 X 6F	48	6	8.5 ± 0.5	60 ± 5	1200			
12 X 6F	72	6	10.0 ± 0.5	80 ± 5	2000			
16 X 6F	96	6	10.5 ± 0.5	92 ± 5	2500			
24 X 6F	144	6	11.5 ± 0.5	126 ± 10	2500			
24 X 6F	288	6	15.0 ± 0.5	185 ± 15	2800			

TEMPERATURE PERFORMANCE (°C)

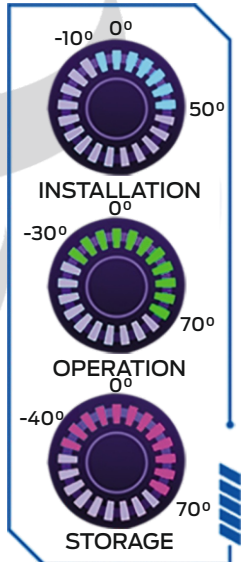

I - INSTALLATION O - OPERATIONAL D - CABLE DIAMETER