


UNARMoured MICRO MODULE SINGLE SHEATH



Backbone Network Feeder and Distribution Duct Manual Pulling Duct Blowing

RATING

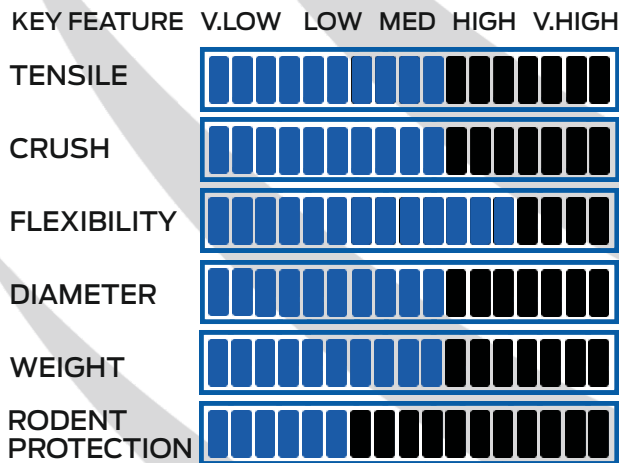

CUSTOMIZED OPTIONS


- Different Fibres Count
- Single mode and Multimode Fibres
- Outer Sheath in LDPE/MDPE/LSZH/HDPE
- Desired Sheath Colour
- Dry Core/ Dry Tube Construction
- Sacrificial Nylon Sheathing

MULTITUBE UNARM CABLE

TYPE	FIBRE COUNT	FIBRE/MODULE	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)	CRUSH	BENDING RADIUS	
							I	O
1 X 12F	12	12	6.5 ± 0.5	45 ± 5	1000	2500 N/10 CM	10 X D	20 X D
2 X 12F	24	12	7.5 ± 0.5	56 ± 5	1200			
3 X 12F	36	12	8.0 ± 0.5	62 ± 5	1200			
4 X 12F	48	12	8.5 ± 0.5	65 ± 5	1200			
6 X 12F	72	12	9.5 ± 0.5	76 ± 5	1300			
8 X 12F	96	12	10.5 ± 0.5	90 ± 5	2000			
12 X 12F	144	12	11.5 ± 0.5	110 ± 10	2500			
24 X 12F	288	12	13.5 ± 0.5	135 ± 10	3000			

I - INSTALLATION O - OPERATIONAL D - CABLE DIAMETER

TEMPERATURE PERFORMANCE (°C)

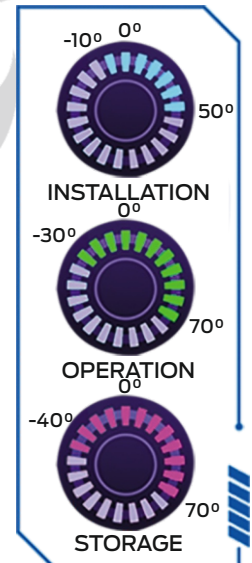

STANDARD COMPLIANCE

TELECORDIA GR-20 IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS