


**UNARMoured MICRO MODULE  
WITH STEEL WIRE**



Outdoor Access Network CATV Distribution Network LAN & FTTX

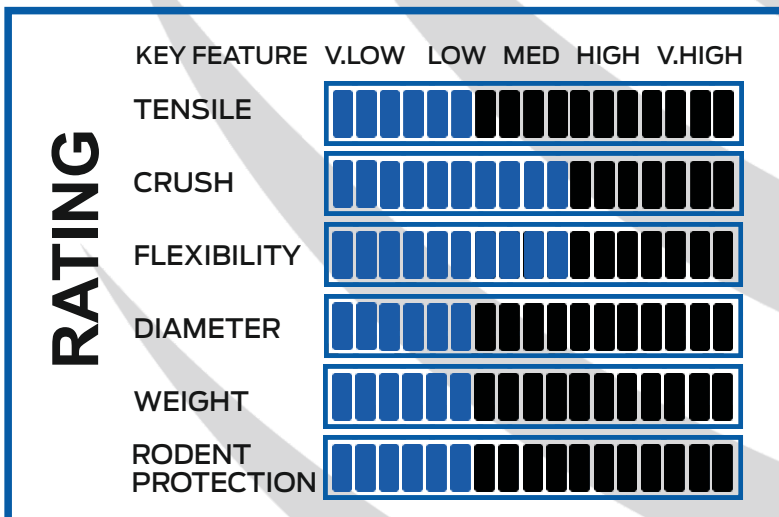


- CUSTOMIZED OPTIONS**
- Single mode and multimode fibres
  - Outer sheath in HDPE/LDPE/MDPE/LLDPE/LSZH/FR-PE
  - Desired Sheath Colour
  - Enhanced Tensile Performance
  - Dry Tube Construction

UNITUBE UNARM WITH STEEL WIRE									
TYPE	FIBRE COUNT	FIBRE/MODULE	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)	CRUSH	BENDING RADIUS		
							I	O	
1 X 4F	4	4	7.0 ± 0.3	40	1200	2000 N/10 CM	10 X D	20 X D	
1 X 12F	12	12	7.0 ± 0.3	40					
2 X 12F	24	12	7.0 ± 0.3	40					
3 X 12F	36	12	7.0 ± 0.3	40					
4 X 12F	48	12	7.0 ± 0.3	40					
8 X 12F	96	24	9.0 ± 0.5	56					
1 X 4F	4	4	6.0 ± 0.3	30					
1 X 12F	12	12	6.0 ± 0.3	30					

I - INSTALLATION O - OPERATIONAL D - CABLE DIAMETER

TEMPERATURE PERFORMANCE (°C)

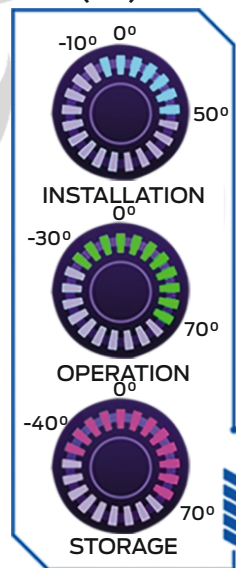

### STANDARD COMPLIANCE

TELECORDIA GR-20 IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS