


Premises Distribution Feeder and Distribution Ducts and Trays Last Mile LAN & FTTX

BREAKOUT CABLE

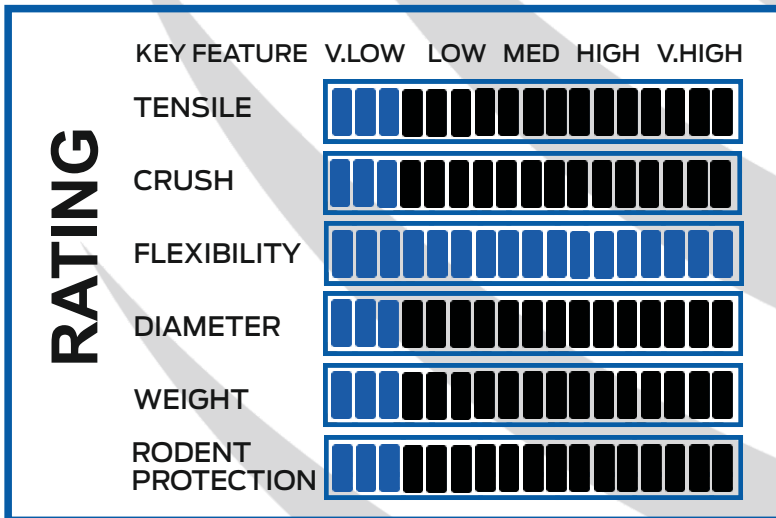


- ### CUSTOMIZED OPTIONS
- Single mode and Multimode Fibres
 - Desired Sheath Colour
 - Sheath in PU/LSZH
 - Tight Buffering in Nylon - 12 / LSZH / PVC
 - 900 micron Tight Buffer & 600 micron Tight Buffer

PREMISES DISTRIBUTION CABLES

TYPE	FIBRE COUNT	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)		CRUSH	BENDING RADIUS	
				I	O		I	O
2F	2	7.5 ± 0.5	55 ± 5	400	400	500N/ 10 CM	75	150
4F	4	7.5 ± 0.5	55 ± 5	400	400		75	150
6F	6	8.5 ± 0.5	75 ± 10	800	800		85	160
8F	8	10.5 ± 0.5	100 ± 10	1000	1000		100	200
12F	12	12.7 ± 0.5	155 ± 15	1500	1500		127	254
16F	16	13.0 ± 0.5	130 ± 15	2000	2000		130	260
24F	24	15.0 ± 0.5	215 ± 20	2500	2500		150	300
48F	48	18.0 ± 1	270 ± 30	1200	1200		150	300
72F	72	18.0 ± 1	270 ± 30	1200	1200		150	300
96F	96	25.0 ± 2	510 ± 50	1300	1300		150	300

TEMPERATURE PERFORMANCE (°C)

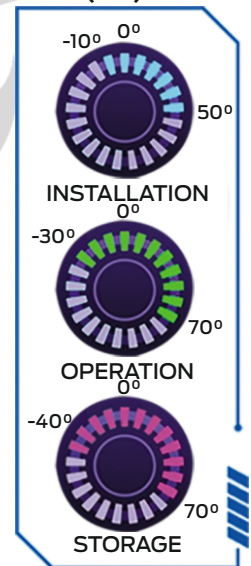

I - INSTALLATION O - OPERATIONAL D - CABLE DIAMETER

STANDARD COMPLIANCE

IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS