

DUPLEX OFC



Indoor Distribution Branching in High Rises Pig Tails Patch Cords LAN & FTTX


RATING	KEY FEATURE	V.LOW	LOW	MED	HIGH	V.HIGH	
	TENSILE	█	█	█	█	█	█
	CRUSH	█	█	█	█	█	█
	FLEXIBILITY	█	█	█	█	█	█
	DIAMETER	█	█	█	█	█	█
	WEIGHT	█	█	█	█	█	█
	RODENT PROTECTION	█	█	█	█	█	█

- ### CUSTOMIZED OPTIONS
- Single mode and Multimode Fibres
 - Desired Sheath Colour
 - Sheath in PU/PVC/LSZH
 - Tight Buffering in Nylon - 12 / LSZH / PVC

DUPLEX								
TYPE	FIBRE COUNT	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)		CRUSH	BENDING RADIUS	
				I	O		I	O
2F (600 m)	2	(2.0 x 4.2) ± 0.3	7.0 ± 2	200	100	10CM	10D	20D
2F (900 m)	2	(3.0 x 6.2) ± 0.3	15.0 ± 3	250	100			

I - INSTALLATION O - OPERATIONAL D - CABLE DIAMETER

TEMPERATURE PERFORMANCE (°C)

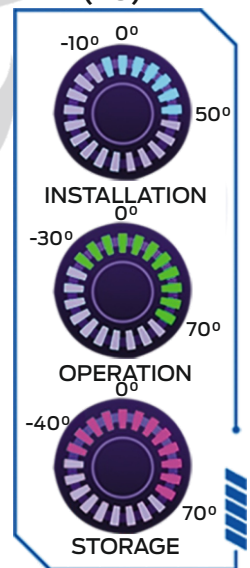

STANDARD COMPLIANCE

IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS