


FLAT INDOOR DROP



Indoor Distribution    Branching in High Rises    Pig Tails    Patch Cords    LAN & FTTX

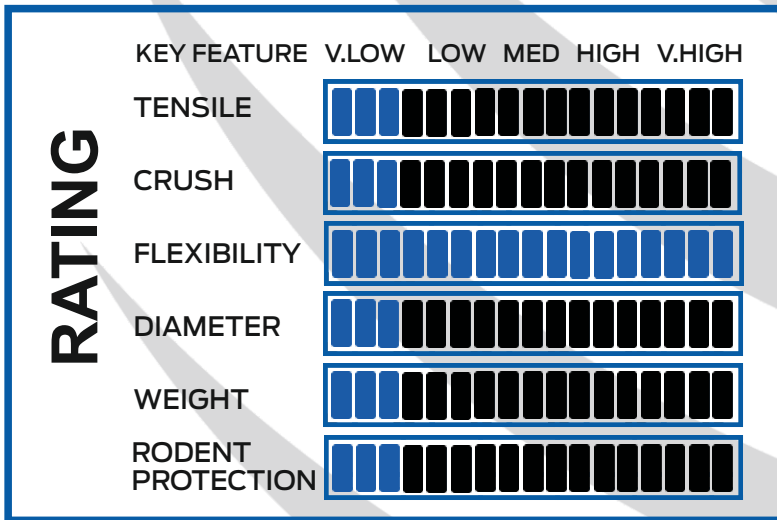


- CUSTOMIZED OPTIONS**
- Single mode and Multimode Fibres
  - Desired Sheath Colour
  - FRP / Steel Wire Strength member

INDOOR DROP CABLE								
TYPE	FIBRE COUNT	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)		CRUSH	BENDING RADIUS	
				I	O		I	O
2F	2	(2.0 X 3.0) ± 0.2	8 ± 2	100	80	1000N / 1010 CM	20MM	32MM
4F	4	(2.0 X 3.0) ± 0.2	8 ± 2				20MM	32MM

I - INSTALLATION    O - OPERATIONAL    D - CABLE DIAMETER

TEMPERATURE PERFORMANCE (°C)

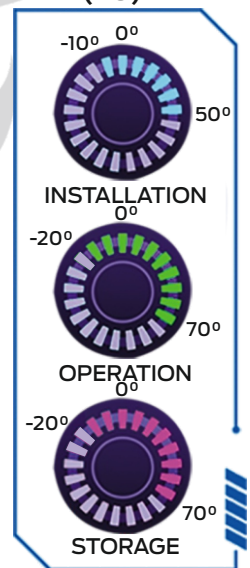

## STANDARD COMPLIANCE

TELECORDIA GR-409 IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS