


SIMPLEX OFC



Indoor Distribution Branching in High Rises Pig Tails Patch Cords LAN & FTTX

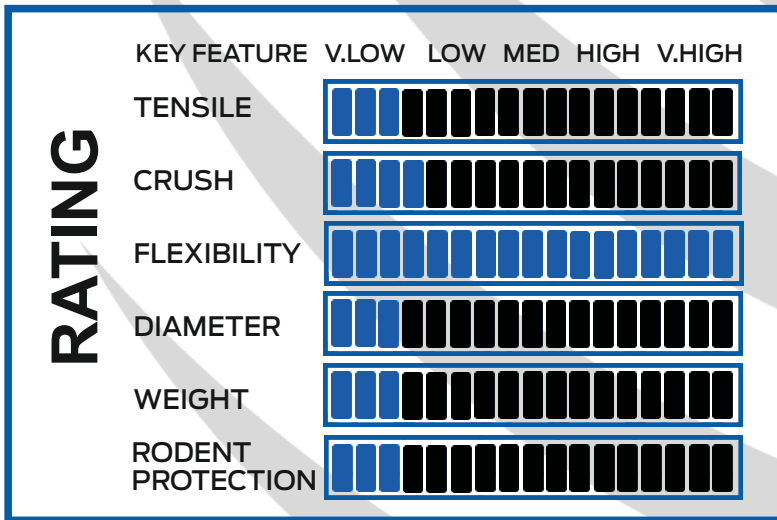


- ### CUSTOMIZED OPTIONS
- Single mode and Multimode Fibres
 - Desired Sheath Colour
 - Sheath in PU/PVC/LSZH
 - Tight Buffering in Nylon - 12 / LSZH / PVC

SIMPLEX								
TYPE	FIBRE COUNT	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)		CRUSH	BENDING RADIUS	
				I	O		I	O
1F	1	2.0 ± 0.3	3.0 ± 1	100	50	400N	10D	20D
1F	1	3.0 ± 0.3	7.0 ± 2	150	75			

I - INSTALLATION O - OPERATIONAL D - CABLE DIAMETER

TEMPERATURE PERFORMANCE (°C)

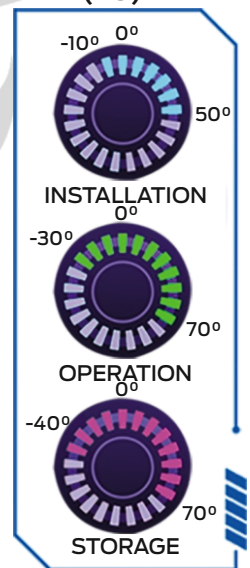

STANDARD COMPLIANCE

IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS