

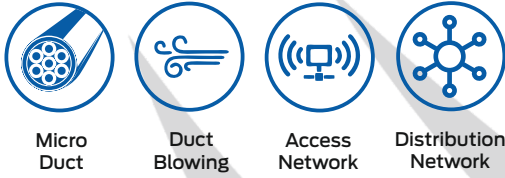


# FUTURELINE

## MIC-MT-ET (EXTRA THIN) MICRODUCT MULTITUBE EXTRATHIN- 250M SERIES

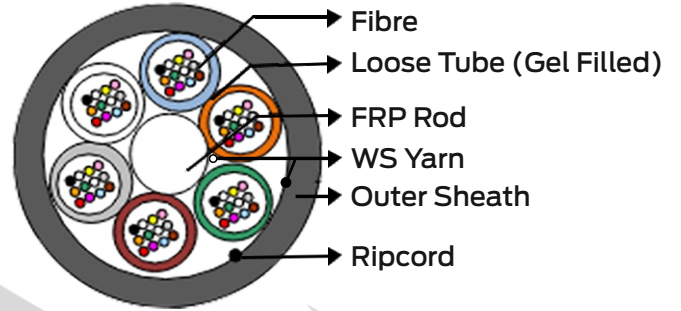

### MULTITUBE MICRO

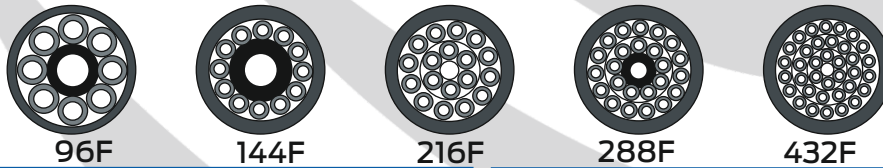

RATING	KEY FEATURE	V.LOW	LOW	MED	HIGH	V.HIGH
	TENSILE					
	CRUSH					
	FLEXIBILITY					
	DIAMETER					
	WEIGHT					
	RODENT PROTECTION					


### CUSTOMIZED OPTIONS

- Single mode and Multimode Fibres
- Desired Sheath Colour
- Outer Sheath in Polyamide
- Different Fiber Count

EXTRA THIN MICRO CABLE									
TYPE	FIBRE COUNT	FIBRE/TUBE	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)		CRUSH	BENDING RADIUS	
					I	O		I	O
1-6T x 4F	24	4	5.0 ± 0.3	20 ± 5	700	500	1000 N/10 CM	10 X D	20 X D
1-6T x 6F	36	6	5.0 ± 0.3	20 ± 5	700	500			
1-6T x 8F	48	8	5.0 ± 0.3	20 ± 5	700	500			
1-6T x 12F	72	12	5.0 ± 0.3	20 ± 5	700	500			
8T x 12F	96	12	5.8 ± 0.3	35 ± 5	1200	1000			
12T x 12F	144	12	7.6 ± 0.3	55 ± 5	1500	1200			
6T x 24F	144	24	6.4 ± 0.3	35 ± 5	1000	800			
8T x 24F	192	24	7.7 ± 0.3	55 ± 5	1500	1200			
9T x 24F	216	24	8.3 ± 0.3	60 ± 10	1500	1200			
12T x 24F	288	24	10.2 ± 0.3	90 ± 10	1500	1200			
18T x 24F	432	24	10.5 ± 0.3	90 ± 10	1000	800			
24T x 24F	576	24	12.0 ± 0.3	130 ± 10	1500	1200			

I - INSTALLATION    O - OPERATIONAL    D - CABLE DIAMETER

### TEMPERATURE PERFORMANCE (°C)

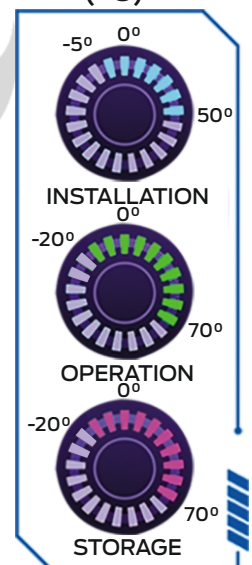

## STANDARD COMPLIANCE

TELECORDIA GR-20 IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS