


MULTITUBE MICRO WS
YARN OVER FRP + CORE

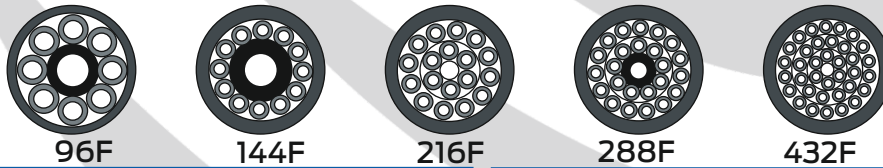


RATING	KEY FEATURE	V.LOW	LOW	MED	HIGH	V.HIGH
	TENSILE	█	█	█	█	█
	CRUSH	█	█	█	█	█
	FLEXIBILITY	█	█	█	█	█
	DIAMETER	█	█	█	█	█
	WEIGHT	█	█	█	█	█
	RODENT PROTECTION	█	█	█	█	█

CUSTOMIZED OPTIONS

- Single mode and Multimode Fibres
- Desired Sheath Colour
- Outer Sheath in Polyamide
- Different Fiber Count

MULTITUBE MICRO CABLE (STANDARD)									
TYPE	FIBRE COUNT	FIBRE/TUBE	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)		CRUSH	BENDING RADIUS	
					I	O		I	O
1-6T x 4F	4-24	4	5.8 ± 0.3	25 ± 5	1000	600	1000 N/10 CM	10 X D	20 X D
1-6T x 6F	6-36	6	5.8 ± 0.3	25 ± 5	1000	600			
1-6T x 8F	8-48	8	5.8 ± 0.3	25 ± 5	1000	600			
1-6T x 12F	12-72	12	5.8 ± 0.3	25 ± 5	1000	600			
8T x 12F	96	12	6.6 ± 0.3	40 ± 5	1200	1000			
12T x 12F	144	12	8.8 ± 0.3	70 ± 10	1200	1000			
16T x 12F	192	12	9.0 ± 0.3	65 ± 10	1200	1000			
18T x 12F	216	12	9.0 ± 0.3	70 ± 10	1200	1000			
24T x 12F	288	12	10.3 ± 0.3	95 ± 10	1200	1000			
36T x 12F	432	12	12.0 ± 0.3	120 ± 10	1000	600			
6T x 24F	144	24	7.5 ± 0.3	50 ± 5	1500	1000			
8T x 24F	192	24	8.8 ± 0.3	75 ± 10	1200	1000			
9T x 24F	216	24	9.2 ± 0.3	80 ± 10	1500	1000			
12T x 24F	288	24	11.5 ± 0.3	105 ± 10	2000	1500			
18T x 24F	432	24	11.7 ± 0.3	125 ± 10	1000	800			
24T x 24F	576	24	13.5 ± 0.3	175 ± 15	2000	1500			

TEMPERATURE PERFORMANCE (°C)

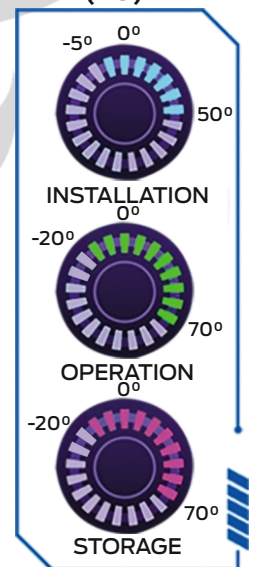

I - INSTALLATION O - OPERATIONAL D - CABLE DIAMETER

STANDARD COMPLIANCE

TELECORDIA GR-20 IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS