


Premises Distribution Feeder and Distribution Ducts and Trays Last Mile LAN & FTTX

UNITUBE MICRO

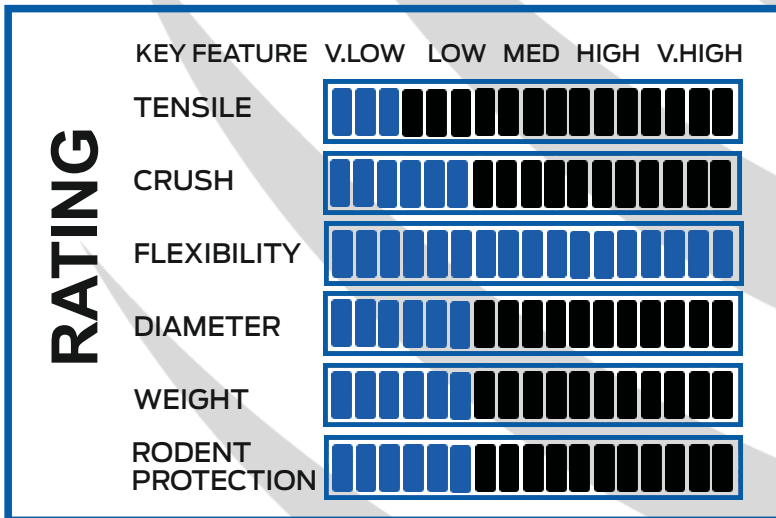


- ### CUSTOMIZED OPTIONS
- Single mode and Multimode Fibres
 - Desired Sheath Colour
 - Outer Sheath in Polyamide
 - Different Fiber Count

UNITUBE MICRO CABLES									
TYPE	FIBRE COUNT	FIBRE/TUBE	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)		CRUSH	BENDING RADIUS	
					I	O		I	O
1T x 2F	2	2	2.5 ± 0.25	5 ± 2	150 N	80 N	500 N/10 CM	10 X D	20 X D
1T x 4F	4	4	2.5 ± 0.25	5 ± 2					
1T x 6F	6	6	2.5 ± 0.25	5 ± 2					
1T x 8F	8	8	2.5 ± 0.25	5 ± 2					
1T x 12F	12	12	2.5 ± 0.25	5 ± 2					

I - INSTALLATION O - OPERATIONAL D - CABLE DIAMETER

TEMPERATURE PERFORMANCE (°C)

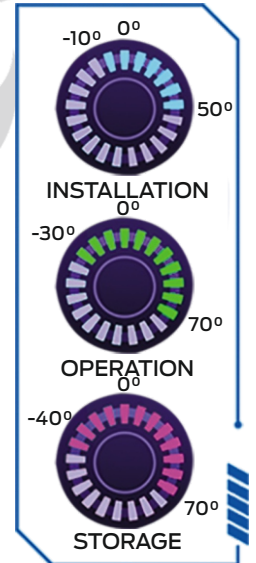

STANDARD COMPLIANCE

TELECORDIA GR-20 IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS