


FIG. 8 OUTDOOR DROP



Indoor & Outdoor Aerial Short Span LAN & FTTX Last Mile

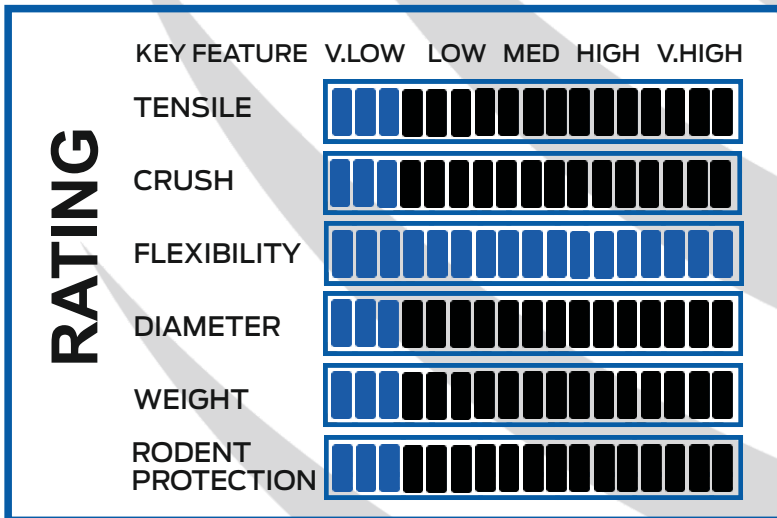


- ### CUSTOMIZED OPTIONS
- Single mode and Multimode Fibres
 - Messenger wire : Steel wire / Bunched
 - KRP / Steel wire / FRP embedded strength member
 - Desired Sheath Colour

OUTDOOR DROP CABLE								
TYPE	FIBRE COUNT	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)		CRUSH	BENDING RADIUS	
				I	O		I	O
2F	2	(2.1 X 5.2) ± 0.2	18 ± 2	600	300	2000N / 10CM	20MM	32MM
4F	4	(2.1 X 5.2) ± 0.2	18 ± 2					

I - INSTALLATION O - OPERATIONAL D - CABLE DIAMETER

TEMPERATURE PERFORMANCE (°C)

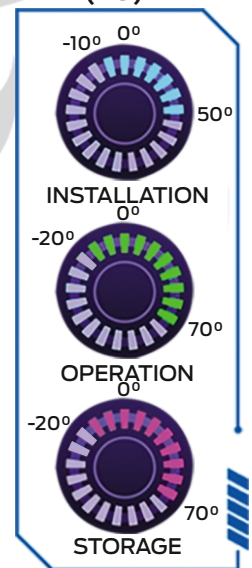

STANDARD COMPLIANCE

TELECORDIA GR-20 IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS