
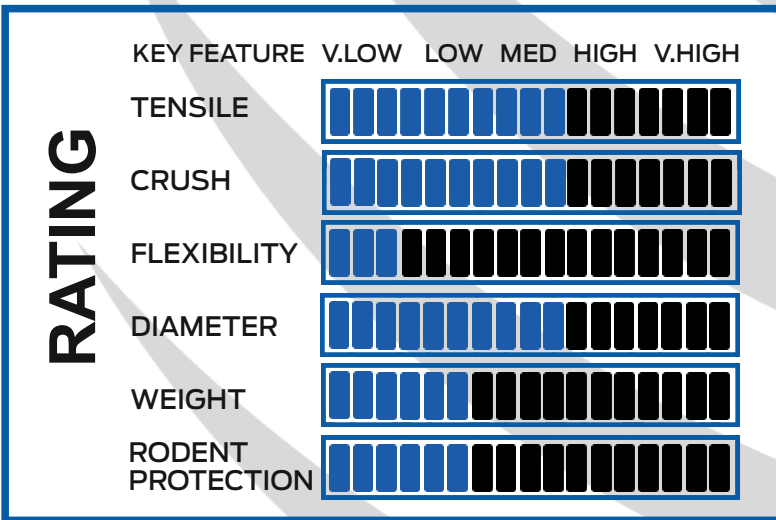


UNARMoured UNITUBE FIG 8

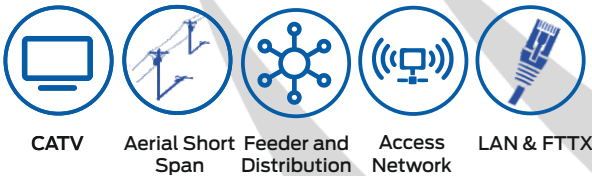


- CUSTOMIZED OPTIONS**
- single mode and Multimode Fibres
 - Outer Sheath in LDPE/MDPE/LSZH/HDPE /LLDPE
 - Desired Sheath Colour
 - Enhanced Tensile performance
 - Messenger FRP or Bunch wire or Messenger steel wire

UNITUBE FIGURE 8 AERIAL CABLE

TYPE	FIBRE COUNT	FIBRE/TUBE	DIAMETER (MM)	WEIGHT (KG/KM)	TENSILE STRENGTH (N)		CRUSH	BENDING RADIUS	
					I	O		I	O
1T x 2F	2	2	(6.5 x 12.5) ± 0.5	60 ± 10	1000	500	1000 N/10 CM	10 X D	20 X D
1T x 4F	4	4	(6.5 x 12.5) ± 0.5	60 ± 10					
1T x 6F	6	6	(6.5 x 12.5) ± 0.5	60 ± 10					
1T x 8F	8	8	(6.5 x 12.5) ± 0.5	60 ± 10					
1T x 12F	12	12	(6.5 x 12.5) ± 0.5	60 ± 10					
1T x 16F	16	16	(6.5 x 13.0) ± 1	75 ± 10					
1T x 24F	24	24	(6.5 x 13.0) ± 1	75 ± 10					

TEMPERATURE PERFORMANCE (°C)

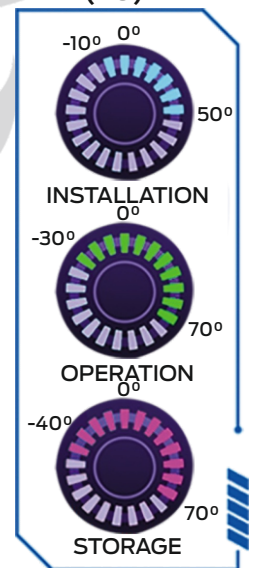

I - INSTALLATION O - OPERATIONAL D - CABLE DIAMETER

STANDARD COMPLIANCE

TELECORDIA GR-20 IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS